

AMAZONITE




AMAZONITE POL RECT.
60X120 / 24"X48" P34/M

AMAZONITE POL RECT.
120X120 / 24"X48" P52/M

Amazonite preserves the timeless beauty of amazonite stone creating exclusive settings and refined atmospheres. The series is able to decorate spaces in an elegant way, with intense and delicate shades and harmonious nuances.

Amazonite conserva la belleza atemporal de la piedra amazonita para crear ambientes exclusivos y atmósferas refinadas. La serie es capaz de decorar por sí misma los espacios de manera elegante, con tonalidades intensas y delicados y armoniosos matices.

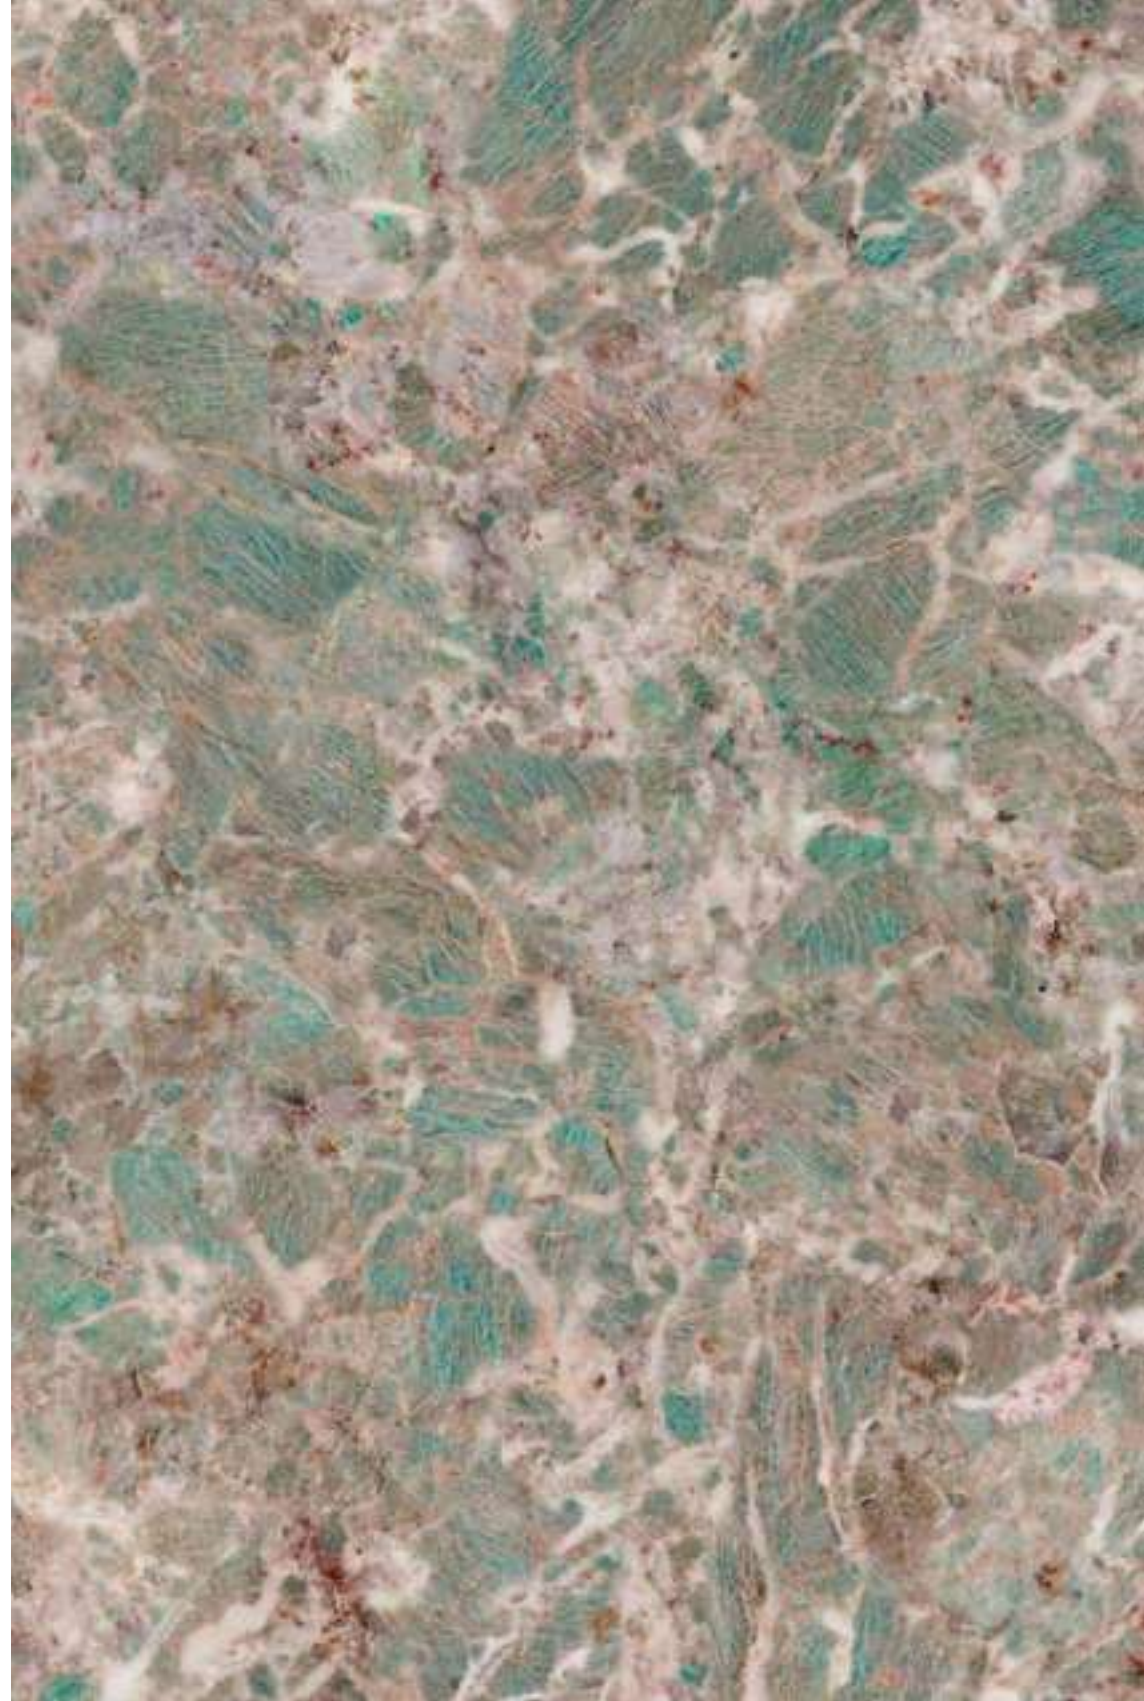




AMAZZONITE RECT. 60X120 / AMAZZONITE RECT. 120X120 / WORK B TAUPE RECT. 60X120

AMAZONITE POL RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037617	120X120	0,00	

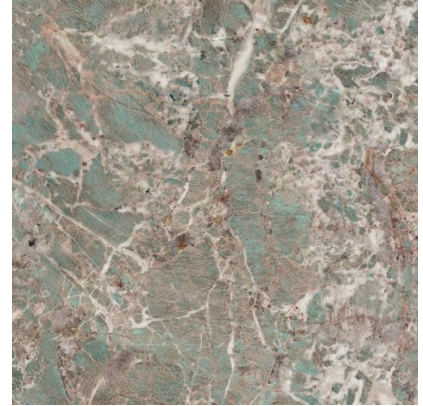

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------


PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

AMAZONITE POL RECT 60X120

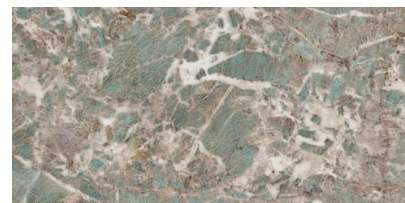

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037620	60x120	0,00	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ROD. AMAZONITE POL 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038285	7,5x60	0,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5