

FIOR DI PESCO



FIOR DI PESCO POL. RECT.
60X120 / 24"X48" P34/M


FIOR DI PESCO POL. RECT.
120X120 / 24"X48" P52/M

Fior di Pesco is an Italian marble, whose origin is in the town of Pierabech. It stands out for its light shades, from white to grey and light green, with veins of ivory, grey and pink. Very appreciated by architects and interior designers, this material allows for a variety of uses and coverings.

Fior di Pesco es un mármol italiano, cuyo origen está en la localidad de Pierabech. Destaca por sus tonos claros que van del blanco al gris y al verde claro, con vetas de marfil, gris y colores rosados. Muy apreciado por los arquitectos y diseñadores de interiores, este material se presta a una variedad de usos y revestimientos.

FIOR DI PESCO POL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037933	60x120	10,60	

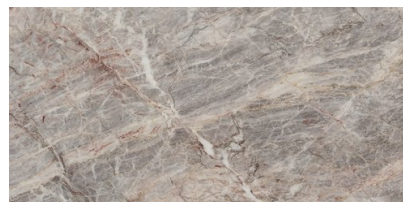

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ROD. FIOR DI PESCO POL 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038359	7,5x60	0,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5