

WABI BIANCO MATT RECT 120X260

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037008	120X260	5,60	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 50 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd) UNE-ENV12633 Class 2

WABI SABBIA MATT RECT 120X260

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037010	120X260	5,60	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 50 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd) UNE-ENV12633 Class 2

WABI TAUPE MATT RECT 120X260

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037012	120X260	5,60	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 50 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd) UNE-ENV12633 Class 2

WABI BIANCO LAPATTO RECT

120X120



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A033984	120X120	12,00	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI SABBIA LAPATTO RECT

120X120

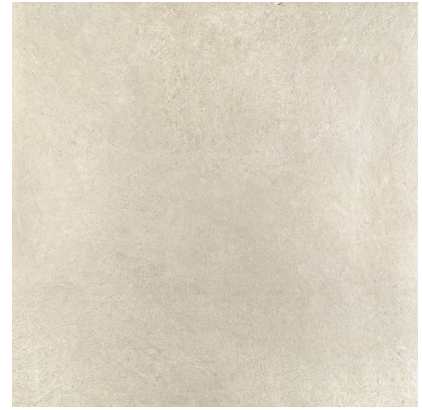

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A033985	120X120	11,50	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI TAUPE LAPATTO RECT

120X120

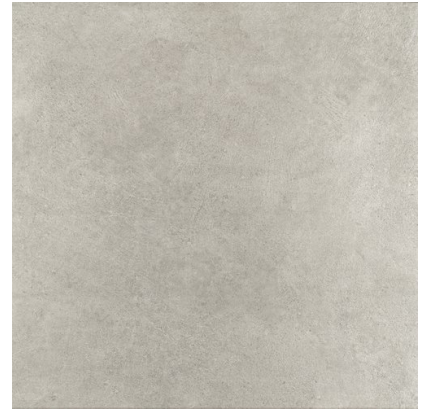

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A033983	120X120	12,00	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	ULA
Resistance to alkalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI GRAFITE LAPATTO RECT

120X120

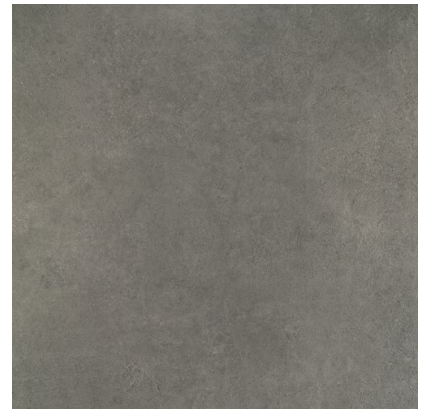

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A033981	120X120	12,00	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI BIANCO LAPATTO RECT

60X120



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034195	60x120	10,20	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alkalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI SABBIA LAPATTO RECT

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034197	60x120	10,20	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alkalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI TAUPE LAPATTO RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034198	60x120	10,20	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI GRAFITE LAPATTO RECT

60X120



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034196	60x120	10,20	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

STRU WABI BIANCO RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034191	60x120	10,90	

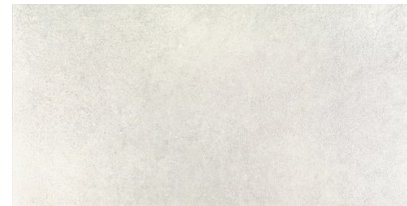

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

STRU WABI SABBIA RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034193	60x120	10,90	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

STRU WABI TAUPE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034194	60x120	10,50	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

STRU WABI GRAFITE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034192	60x120	11,50	

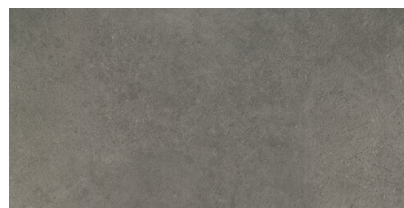

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

WABI BIANCO LAPATTO RECT.

60X60



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034203	60X60	10,00	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI SABBIA LAPATTO RECT. 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034205	60X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI TAUPE LAPATTO RECT. 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034206	60X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI GRAFITE LAPATTO RECT.

60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034204	60X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

STRU WABI BIANCO RECT. 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034199	60X60	10,00	

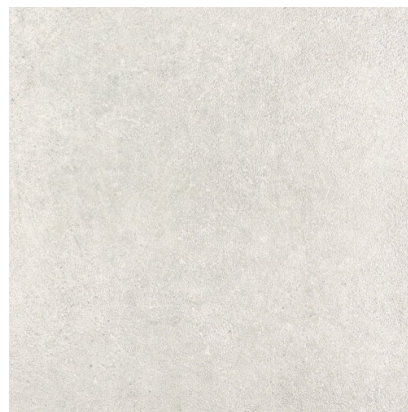

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

STRU WABI SABBIA RECT. 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034201	60X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

STRU WABI TAUPE RECT. 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034202	60X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

STRU WABI GRAFITE RECT. 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034200	60X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

TRAVERTINO BRESCIA STRU RECT.

60X60



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034362	60X60	10,00	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

TRAVERTINO SILVER STRU RECT.

60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034365	60X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

WABI BIANCO LAPATTO RECT.

30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034211	30X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alkalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI SABBIA LAPATTO RECT.30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034213	30X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

WABI GRAFITE LAPATTO

RECT.30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034212	30X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 2
Slip resistance (R)	DIN 51130	R10
Slip resistance (barefeet)	DIN 51097	C

STRU WABI BIANCO RECT.30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034207	30X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

STRU WABI SABBIA RECT.30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034209	30X60	10,00	

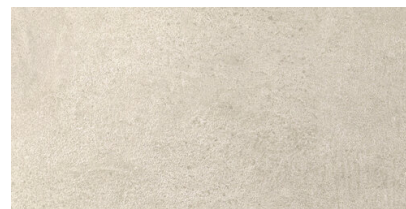

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

STRU WABI TAUPE RECT.30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034210	30X60	10,00	

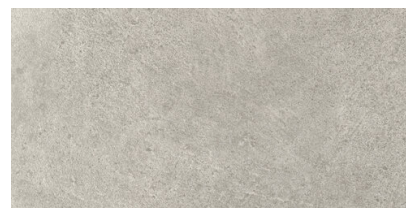

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

STRU WABI GRAFITE RECT.30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034208	30X60	10,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	150
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Resistance to cleaning products	EN ISO 10545-13	UA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

PELDAÑO RECTO C1 WABI BIANCO

33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036252	33x120	0,00	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 1
Slip resistance (R)	DIN 51130	R9

PELDAÑO RECTO C1 WABI SABBIA

33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036251	33x120	0,00	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 1
Slip resistance (R)	DIN 51130	R9

PELDAÑO RECTO C1 WABI TAUPE

33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036253	33x120	32,70	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 1
Slip resistance (R)	DIN 51130	R9

PELDAÑO RECTO C1 WABI GRAFITE

33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036250	33x120	0,00	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 1
Slip resistance (R)	DIN 51130	R9

PELDAÑO RECTO ANT. C3 WABI

BIANCO 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034441	33x120	38,00	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

PELDAÑO RECTO ANT. C3 WABI

SABBIA 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034440	33x120	13,00	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

PELDAÑO RECTO ANT. C3 WABI

TAUPE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034442	33x120	38,00	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

PELDAÑO RECTO ANT. C3 WABI

GRAFITE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034439	33x120	13,00	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

TABICA WABI BIANCO LAPATTO

15X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A035180	15X120	10,90	



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

CHEMICAL PROPERTIES

BORDE SKIMMER WABI BIANCO

45X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A035008	45x75	30,00	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

BORDE SKIMMER WABI SABBIA

45X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034945	45x75	30,00	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

BORDE SKIMMER WABI TAUPE

45X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034946	45x75	30,00	Extruded



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

BORDE DESBORDANTE WABI

BIANCO 28X66,5



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034455	28x66,5	30,00	Extruded

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alkalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R12
Slip resistance (barefeet)	DIN 51097	C

BORDE DESBORDANTE WABI

SABBIA 28X66,5



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034454	28x66,5	30,00	Extruded

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R12
Slip resistance (barefeet)	DIN 51097	C

BORDE DESBORDANTE WABI

TAUPE 28X66,5



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034456	28x66,5	30,00	Extruded

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R12
Slip resistance (barefeet)	DIN 51097	C

REJILLA WABI BIANCO 24,5X24,5



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034461	24X24	30,30	Extruded

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

REJILLA WABI SABBIA 24,5X24,5



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034460	24X24	30,70	Extruded

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test


CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

REJILLA WABI TAUPE 24,5X24,5



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A034462	24X24	30,00	Extruded

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	=1.5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-ENV12633	Class 3
Slip resistance (R)	DIN 51130	R11

ROD. WABI BIANCO LAPATTO 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A035640	7,5x60	9,50	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Stains resistance	EN ISO 10545-14	5

ROD. WABI SABBIA LAPATTO 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A035681	7,5x60	9,60	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Stains resistance	EN ISO 10545-14	5

ROD. WABI TAUPE LAPATTO 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036364	7,5x60	9,50	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Stains resistance	EN ISO 10545-14	5

ROD. STRU WABI SABBIA 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A035802	7,5x60	9,60	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Stains resistance	EN ISO 10545-14	5

ROD. STRU WABI TAUPE 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A035800	7,5x60	0,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Stains resistance	EN ISO 10545-14	5

ROD. WABI GRAFITE LAPATTO

7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A035641	7,5x60	0,00	



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	ULA
Resistance to alcalis	EN ISO 10545-13	ULA
Stains resistance	EN ISO 10545-14	5